


ISM Band - Antenna for Industrial Application

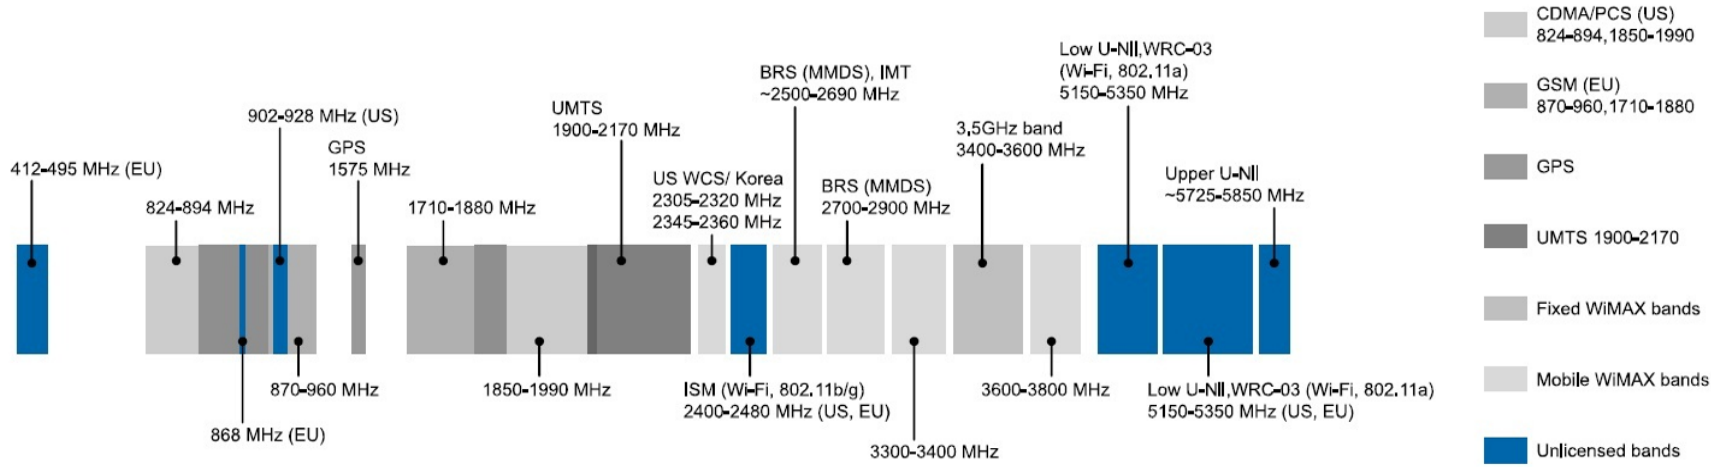

Frequency Range		412-495MHz	868-930MHz	2.4-2.5GHz(802.11b/g/n) Bluetooth		2.4-2.5 & 4.9-5.875GHz(802.11a/b/g/n)	
Antenna selection	Gain	1 dBi Max	1 dBi Max	2,5dBi		11b/g 5dBi, 11a 7dBi	
	GTT P/N	ID-ST-0433-02-C5-L040	ID-RA-0868-02-C5-L054	ID-RA-2400-02-C5R-L057	ID-RA-2400-02-C5R-L083	ID-RA-DB-0507-C5R-L193	
	Connector	SMA	SMA	RP-SMA	RP-SMA	RP-SMA	
	Dimensions	L= 40mm	L= 54mm	L= 57mm	L= 83mm	L= 193mm	
	Product Picture						
Antenna selection	Gain	2dBi	2dBi	2dBi	5dBi	7dBi	11b/g 5dBi, 11a 7dBi
	GTT P/N	OD-ST-0433-02-C7-L180	OD-ST-0868-02-C7-L180	OD-ST-2400-02-C5R-L079	OD-ST-2400-05-C0-L180	OD-ST-2400-07-C5R-L272	OD-ST-DB-0507-C0-L180
	Connector	TNC	TNC	RP-SMA	N	RP-SMA	N
	Dimensions	L= 180mm	L= 180mm	L= 79mm	L= 180mm	L= 272mm	L= 180mm
	Product Picture						

Antenna Pig-tail Interface Platform (U,FL, H,FL, MMCX, MCX Available)	Panel Side Jumpers (U,FL, H,FL, MMCX, MCX Available)
C0	
STD-N Plug	STD-N Jack
C5	
STD-SMA Plug	STD-SMA Jack
C5R	
RP-SMA Plug	RP-SMA Jack
C7	
STD-TNC Plug	STD-TNC Jack