


Licensed Band - Antenna for Industrial Application

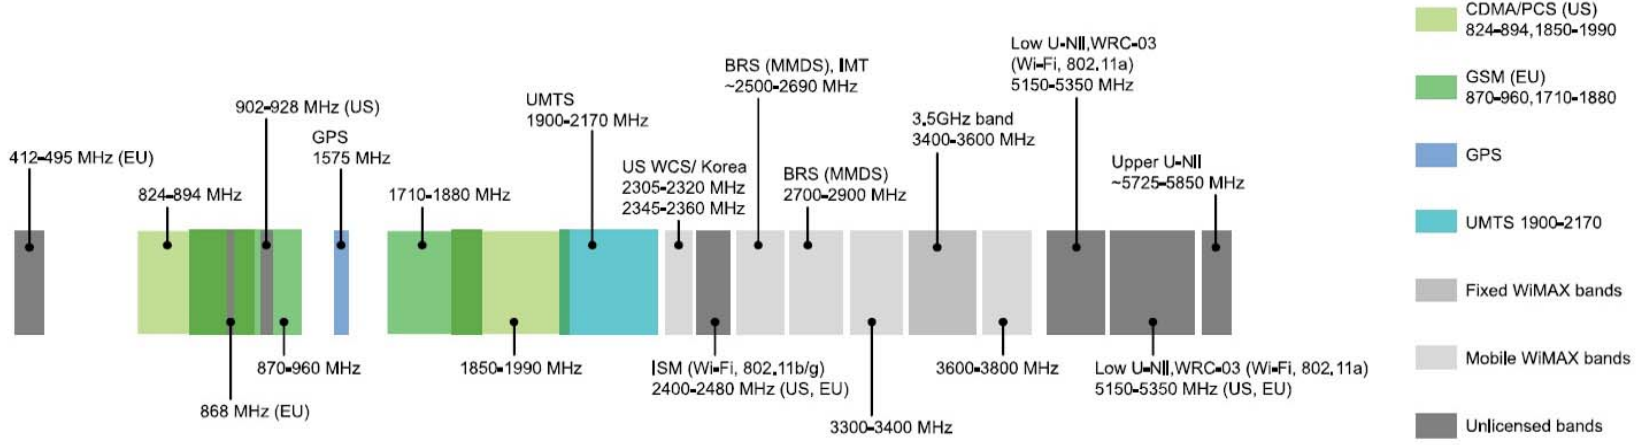

- CDMA/PCS (US) 824-894, 1850-1990
- GSM (EU) 870-960, 1710-1880
- GPS
- UMTS 1900-2170
- Fixed WIMAX bands
- Mobile WIMAX bands
- Unlicensed bands

Frequency Range		824-960, 1710-2170 MHz	824-960, 1710-1990 MHz		1575 MHz ± 5 MHz		824-960, 1710-2170 & GPS	
Antenna selection	Gain	2dBi	0dBi		6dBic (LNA 27dB)		6dBic (LNA 22dB)	
	GTT P/N	ID-RA-PNTA-02-C5-L130	ID-RA-QUAD-00-C5-L083	ID-ST-QUAD-00-C5-L046	ID-GPS-C5-SQ-L500	ID-GPS-C8-SQ-L500	ID-GPS-C5-RD-L500	ID-GPS-C8-RD-L500
	Connector	SMA	SMA	SMA	SMA	Fakra C	SMA	Fakra C
	Dimensions	L= 130mm	L= 83mm	L= 46mm	Cable Length = 5M		Cable Length = 5M	
	Product Picture		 Low Profile	 Low Profile				
	Gain	0~2dBi		0dBi	6dBic (LNA 27dB)		6dBic (LNA 22dB)	
	GTT P/N	OD-ST-PNTA-02-C7-L180		OD-ST-QUAD-00-C5-L046	OD-GPS-C5-SQ-L500	OD-GPS-C8-SQ-L500	OD-GPS-C5-RD-L500	OD-GPS-C8-RD-L500
	Connector	TNC		SMA	SMA	Fakra C	SMA	Fakra C
	Dimensions	L= 180mm		L= 46mm	Cable Length = 5M		Cable Length = 5M	
	Product Picture			 Low Profile				

* Equivalent spec may be adopted.

Antenna Pig-tail Interface Platform (U,FL, H,FL, MMCX, MCX Available)	Panel Side Jumpers (U,FL, H,FL, MMCX, MCX Available)
C0	
C3	
C4	
C5	
C5R	
C6	
C7	
C8	
C9	